
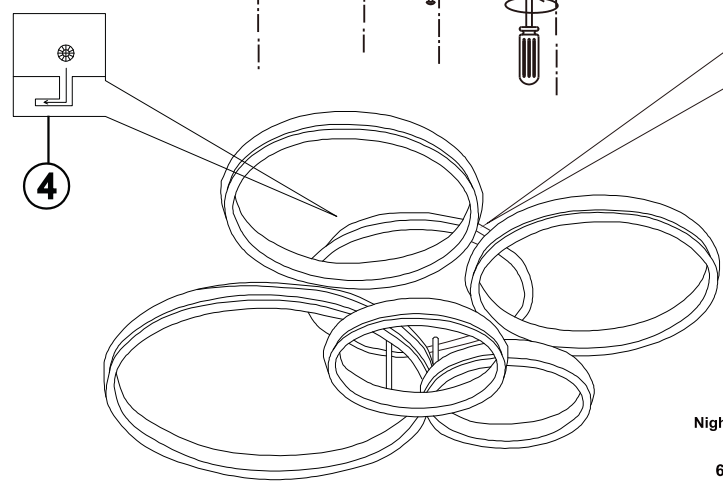


MAX 120W LED DC 35V 230V~ 50/60Hz	
Frequency Bandwidth	Maximal radiation transmitting power
2410-2475MHz	-0.7dBm

GLOBO LIGHTING

67260-120

B

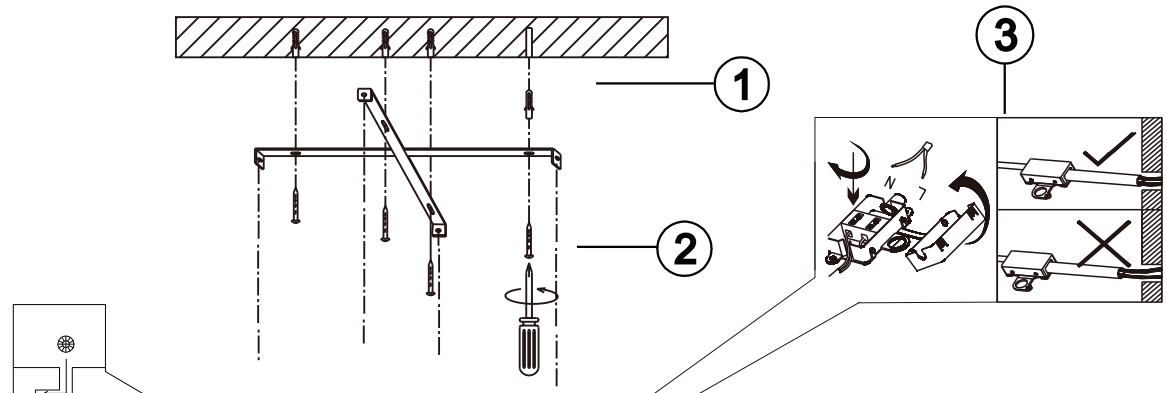

ON

LM ↑

6000K

ON	○ OFF
☀ LM ↑	☀ LM ↓
● CCT ↑	○ CCT ↓
↻	☾

OFF

LM ↓

2700K

Night light

Night light → 2700K

6000K ← 4000K

- memory function
- 4000K **3** LIGHT STEPS 6000K 2700K
- 2700K-6000K
- night light
- dimmable
- colour fixing
- incl.
- many light steps
- many steps

1 2 3 4

2x AAA 1.5V battery incl.

Reset remote control

ON Step 1 → OFF Step 2 → ON Step 3 → OFF Step 4 → ON Step 5 → OFF Step 6 → ON Step 7

2700K → 4000K → 6000K → Night light

BATTERY DATA


2xAAA Super Heavy Duty Battery*incl.

*Manufacturer: Shenzhen GMCELL TECHNOLOGY CO.,LTD

Address: G Building,Hualian Panorama International Building, 27 District, Bao'an, Shenzhen,China

Model:R03P UM-4 1.5V

SAFETY INSTRUCTIONS

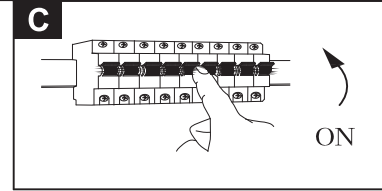

GLOBO Handels GmbH
 Gewerbestrasse 3, A-9184 Sankt Peter, AUSTRIA
 www.globo-lighting.com | office@globo-lighting.com

